


METALDRIVE® GMD type “SA1”

Shaft version. The shaft is of variable length and can be delivered in welded aluminum or steel.

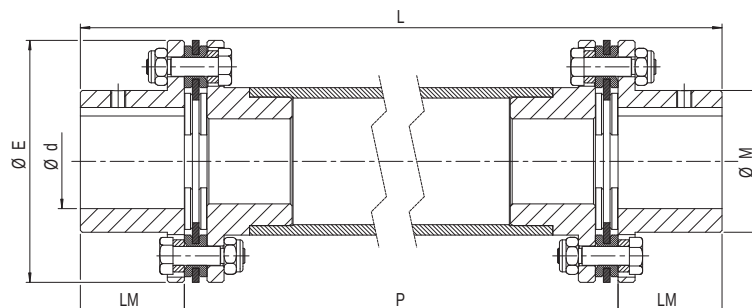

Type	Dimensions [mm]						
	d max	E	M	LM	SA1		
					P	L	
32	32	80	45	40	Shaft length on request	P+	80
38	38	92	53	45		P+	90
45	45	112	64	45		P+	90
52	52	136	75	55		P+	110
65	65	162	92	65		P+	130
80	80	182	112	80		P+	160
90	90	206	130	80		P+	160
95	95	226	135	90		P+	180
110	110	252	155	100		P+	200
120	120	296	170	110		P+	220
138	138	318	195	140		P+	280
155	155	352	218	150		P+	300
175	175	386	252	175		P+	350
190	190	426	272	190		P+	380
205	205	456	292	205		P+	410

Order form

GMD SA1 52 F20 F30 P2000 METALDRIVE® coupling
 Type
 Coupling size
 1st Hub bore [mm]
 2nd Hub bore [mm]
 Distance between shaft ends [mm]