


# Stainless steel joints

## Series “X” (DIN 808)

- Max. angle: 45° type “X”, 90° type “XD”.
- Special executions upon request.

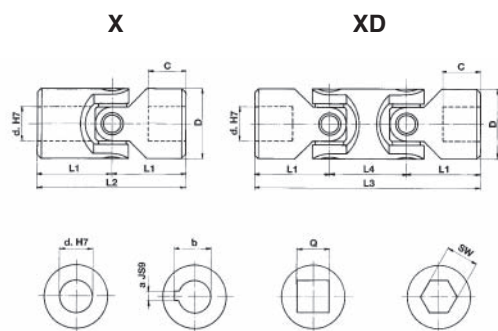

| Type  | Type   | d<br>[mm] | D<br>[mm] | L2<br>[mm] | L1<br>[mm] | C<br>[mm] | L4<br>[mm] | L3<br>[mm] | a*<br>[mm] | b*<br>[mm] | Q*<br>[mm] | SW*<br>[mm] | Weight [kg] |      |
|-------|--------|-----------|-----------|------------|------------|-----------|------------|------------|------------|------------|------------|-------------|-------------|------|
|       |        |           |           |            |            |           |            |            |            |            |            |             | X           | XD   |
| GU01X | GU01XD | 6         | 16        | 34         | 17         | 8         | 22         | 56         | 2          | 7          | 6          | 6           | 0,05        | 0,08 |
| GU02X | GU02XD | 8         | 16        | 40         | 20         | 11        | 22         | 62         | 2          | 9          | 8          | 8           | 0,05        | 0,08 |
| GU03X | GU03XD | 10        | 22        | 48         | 24         | 12        | 26         | 74         | 3          | 11,4       | 10         | 10          | 0,10        | 0,15 |
| GU04X | GU04XD | 12        | 25        | 56         | 28         | 13        | 30         | 86         | 4          | 13,8       | 12         | 12          | 0,16        | 0,25 |
| GU1X  | GU1XD  | 16        | 32        | 68         | 34         | 16        | 36         | 104        | 5          | 18,3       | 16         | 16          | 0,30        | 0,45 |
| GU3X  | GU3XD  | 20        | 42        | 82         | 41         | 18        | 46         | 128        | 6          | 22,8       | 20         | 20          | 0,60        | 1,00 |
| GU5X  | GU5XD  | 25        | 50        | 108        | 54         | 26        | 55         | 163        | 8          | 28,3       | 25         | 25          | 1,20        | 2,00 |
| GU6X  | GU6XD  | 30        | 58        | 122        | 61         | 29        | 68         | 190        | 8          | 33,3       | 30         | 30          | 1,85        | 2,90 |

\* = check availability